PREDIXON
PRO-CHARGE

INDUSTRIAL ENERGY SOLUTIONS

Multi-Use Charging Station Configurations

- Standard pedestal
- Wall mounting
- Truck charging station
- Overhead rail mounting

Flexible. Modular.
Built for your operation.

www.predixon.net · omerderya.dinc@predixon.net · +90 850 242 55 72




STANDARD PEDESTAL CONFIGURATION

Standard Pedestal Use


The unit can be positioned on a standard pedestal for independent, organized field use. Its compact body, accessible connection points and cable management support operator access.

01	Pedestal body
02	Operator-accessible front panel
03	Status indicators and control screen
04	Organized cable management
05	Floor-mountable structure

FRONT VIEW

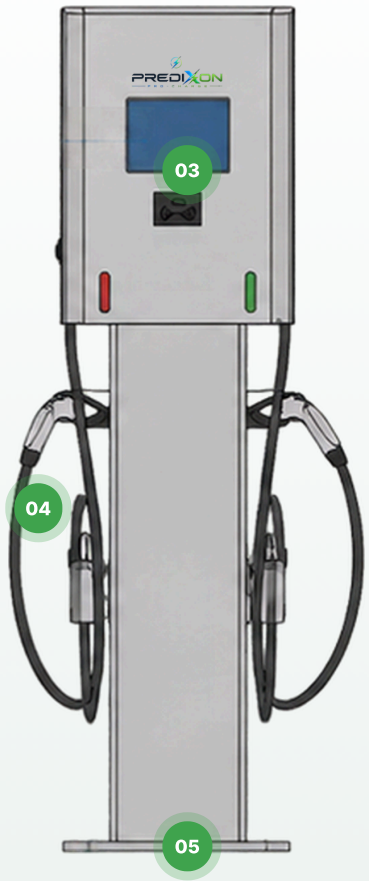

SIDE VIEW

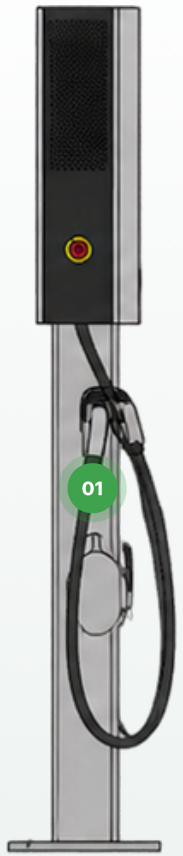

PERSPECTIVE VIEW



TECHNICAL NOTE: Dimensions and electrical values are determined according to the selected configuration.

Mounting Options for Different Needs

01 Wall Mounting



Wall Mounting

Efficient use of space with a compact installation at a fixed location.

02 Truck Charging Station



Truck Charging Station

A solution suited to charging infrastructure for mobile sites and heavy-vehicle operations, mounted on an overhead rail.

03 Standard Pedestal Use




Standard Pedestal

A standard-use option positioned at a fixed location on a pedestal body.


Supporting Versions and Accessories

The standard pedestal unit can be supported by balancer or cable-support-arm versions for different operating needs.

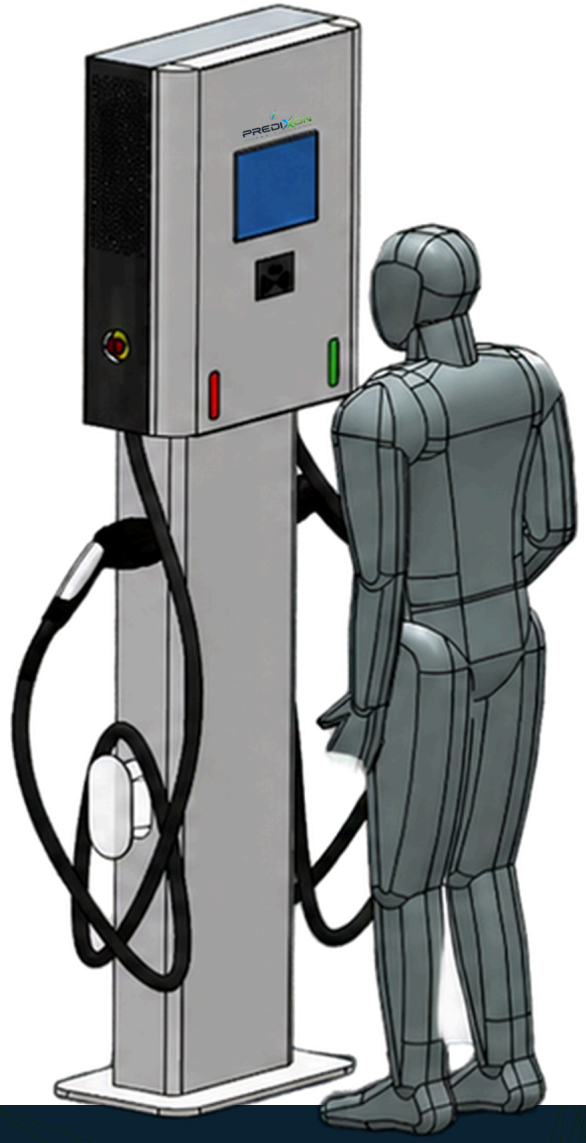


Balancer Version

A solution supporting balanced and controlled cable use.

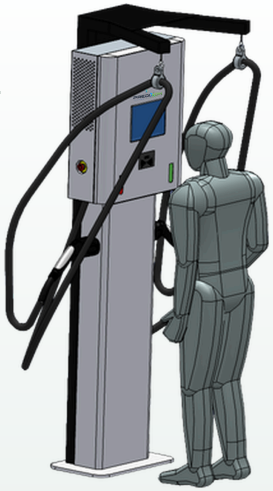

Cable Support Arm Version

A solution that improves cable routing and mobility within the work area.

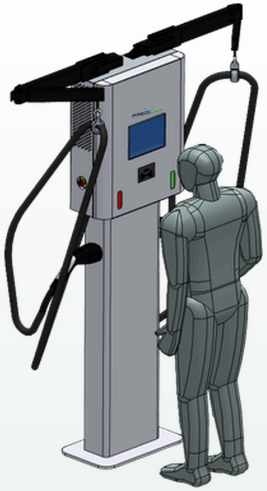

Let us define the right configuration for your application.

Final technical details are determined according to the mounting method, cable type, connection standard and operating conditions.

PREDIXON OÜ
www.predixon.net
omerderya.dinc@predixon.net
+90 850 242 55 72